


### ELECTRICAL FLASHINGS

# COBRA HEAD ELECTRICAL FLASHING

## **PRODUCT INFORMATION**

SKU: P-12099W P-12099-18

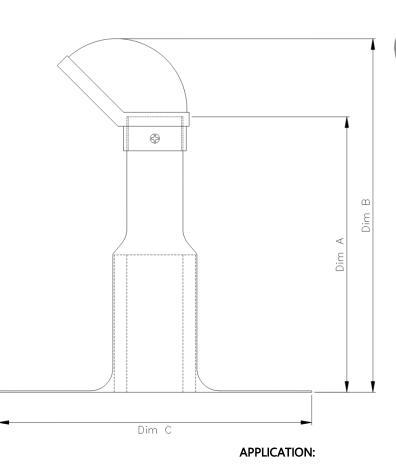

#### FEATURES:

- Spun aluminum bases available in two heights: 12' high with a removable 3-piece PVC head for an overall height of 15", and 18" high with a removable 3-piece PVC head for an overall height of 21"
- PVC head accommodates up to 4 shielded electrical cables, ensuring a weather-tight seal
- Factory insulated base featuring <sup>3</sup>/<sub>4</sub>" thickness polyurethane foam for enhanced thermal efficiency
- 2" inner diameter between the insulation walls for ample conduit space
- 11.5" wide flange on the base of the flashing for secure installation

#### **OVERALL DIMENSIONS**

SKU	SIZE	DIM. "A" BASE HEIGHT	DIM. "B" TOTAL HEIGHT	DIM. "C" DIAMETER
P-12099W	12"	12"	15"	13.69″
P-12099-18	18″	18″	21"	13.69″

# There is no equal to **PLATINUM!**

Please note that PLATINUM products may be periodically updated & are subject to change without prior notice. For additional information, contact PLATINUM ROOFING PRODUCTS at **1-800-538-7767 or info@platinumroofingproducts.com** 



Electrical flashing in the roofing industry is crucial for creating a weather-

tight seal around electrical conduits and service entries. Made from durable

materials like rubber and spun Aluminum, it prevents water infiltration,

safeguarding electrical systems and maintaining roof integrity. Proper

installation minimizes leak risks and ensures compliance with building

codes, enhancing the longevity of the roofing system. PVC head

accommodates up to 4 shielded electrical cables.

74P. U.S. TC1010 . 0924