


COPPER DRAINS

COPPER TEMPORARY DRAINS

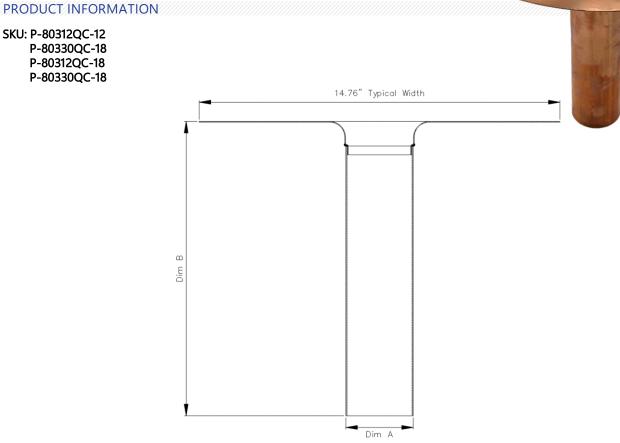

FEATURES:

- Two-piece construction with argon arc welded stem and deck
- Available with 2³/₄" and 3³/₄" drain stems in lengths of 12" and 18"
- Features a 14.76" wide drain deck
- Designed to fit 3" and 4" drain inserts
- Constructed with a 0.75mm material thickness for the copper deck
- Constructed with a 1.2mm material thickness for the copper stem
- Flat deck style allows for ease of installation
- Ideal for reusable temporary drains in various applications

OVERALL DIMENSIONS

APPLICATION:

Temporary drains are used in roofing applications to manage water runoff during construction or maintenance. They help prevent water accumulation on the roof, reducing the risk of leaks, structural damage, and safety hazards. Temporary drains are particularly useful in areas where permanent drainage systems are not yet installed or when immediate water removal is necessary. Their easy installation and removal make them ideal for protecting roofing materials and ensuring a safe working environment.

SKU	SIZE	DIM. "A" STEM DIAMETER	DIM "B" TOTAL HEIGHT
P-80312QC-12	2 3/4"	2.76"	12"
P-80330QC-12	3 3/4"	3.75″	12"
P-80312QC-18	2 3/4"	2.76″	18"
P-80330QC-18	3 3⁄4"	3.75"	18"

There is no equal to **PLATINUM!**

Please note that PLATINUM products may be periodically updated & are subject to change without prior notice. For additional information, contact PLATINUM ROOFING PRODUCTS at **1-800-538-7767 or info@platinumroofingproducts.com**



74P. L.S. TC1010 . 0924