


VENT STACK SERIES

INSULATED VENT STACK

PRODUCT INFORMATION

SKU: P-INS-80311W

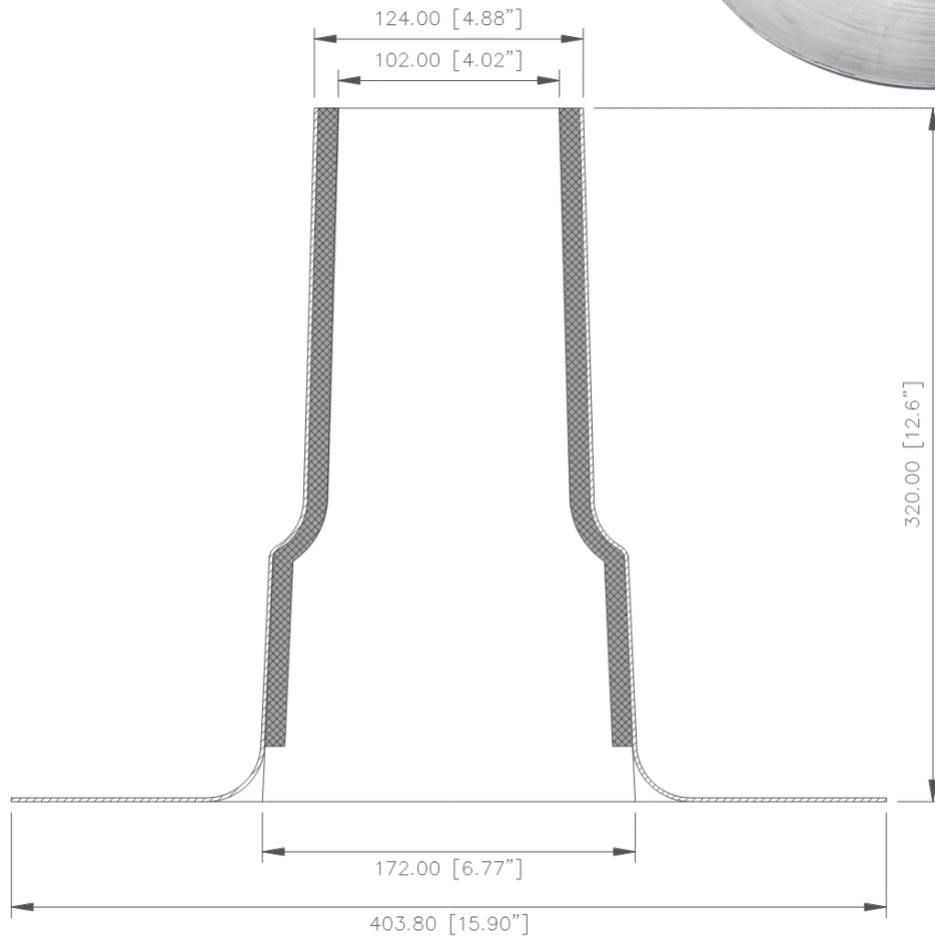

FEATURES:

- Premium gauge Spun Aluminum with a 0.07" (1.8mm) material thickness
- Seamless heavy duty Spun Aluminum construction
- 12.6" (320mm) tall stack height without cap featuring top opening interior dimensions of 4.01" (102 mm) between foam walls
- Heat-molded injected polyurethane foam with a uniform insulation thickness of 0.36" (9.2 mm) on all interior walls
- All Platinum Aluminum products are Spun using soap as a lubricant and thoroughly washed, leaving no oil residue like other products
- Available with either a 3" or 4" VS Cap or Vandal Proof Cap, made of Spun Aluminum and securely attached to the vent stack with screws

APPLICATION:

Vent stacks in roofing systems are used to provide proper ventilation for plumbing systems, allowing air to escape from soil stacks or sanitary pipes. They help maintain consistent air pressure and prevent sewer gases from entering the building.

There is no equal to **PLATINUM!**

*Please note that PLATINUM products may be periodically updated & are subject to change without prior notice.
For additional information, contact PLATINUM ROOFING PRODUCTS at 1-800-538-7767 or info@platinumroofingproducts.com*