


BREATHERS


UNINSULATED TWO-WAY BREATHER

PRODUCT INFORMATION

SKU: P-13009



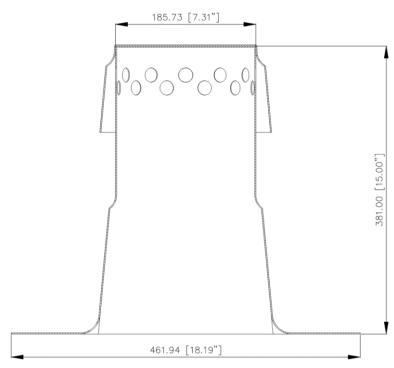

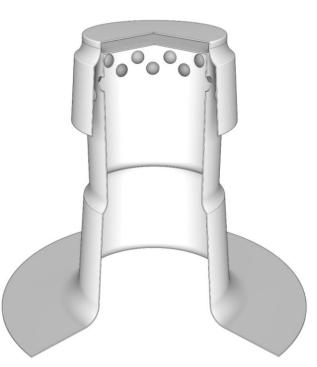

FEATURES:

- Two piece Premium gauge spun aluminum with a 0.07" (1.8mm) material thickness
- Cap secured to ensure watertight two-way ventilation, standing 15" (381mm) high with a 4.5" (114mm) cap overlap
- Pre-drilled holes enable optimal venting and air pressure equalization

APPLICATION:

Two-way breathers are used to equalize air pressure and manage moisture within the roofing system. It allows airflow in both directions, preventing the buildup of condensation and prolonging the roof's lifespan by reducing trapped air and moisture under the roofing membrane. Ideal for use in insulated or protected membrane systems, it helps maintain the integrity of the roof by promoting proper ventilation.

There is no equal to **PLATINUM!**

